


## ACCESSORIES


### RELAY

Solid state relay suited to voltage pulsed  
Temperature controllers  
Input 3-32 volt D.C. Output 35 amps for resistive loads.  
Dimensions 60 x 35 x 20 mm high

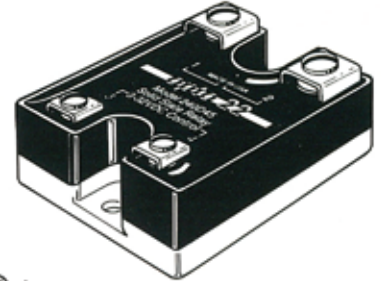


### JUNCTION BLOCKS

CERAMIC BLOCK 2 WAY 20 amp  
30 x 40 x 20 high. Max 250 °C

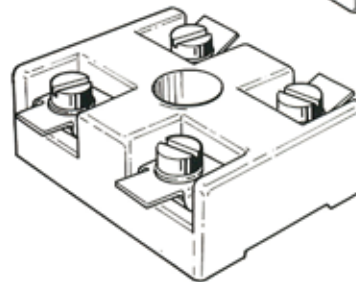


CERAMIC BLOCK 2 WAY 30 amp

30 x 40 x 20 high. Max 250 °C




CERAMIC BLOCK 3 WAY 30 amp

60 x 30 x 25 high. Max 100 °C

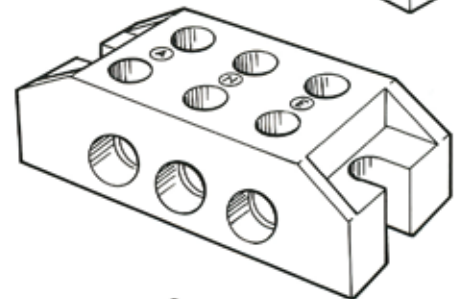

CERAMIC BLOCK 4 WAY 30 amp

60 x 35 x 25 high. Max 100 °C

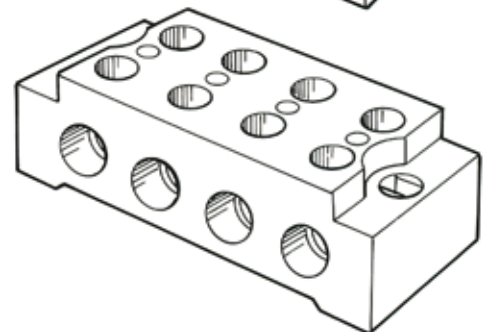

### INSULATION

High temperature **thermal** insulation to 1300 °C  
Ceramic Fibre Board 6.5 mm thick  
Ceramic Fibre Blanket 3.0 mm thick  
Ceramic Fibre Wool 25 mm thick

High temperature **electrical** insulation to 400 °C  
Rigid Mica Board 0.4 mm, 0.5 mm thick 1000 mm x 1200 mm